

## PRODUCT & WORKING DATA

Appearance	Very fine white color powder
Water ratio	Approx. 16 to 17 liters for 40 kg. Bag
Pot life	> 120 Minutes
Thickness	Minimum 1.5 mm. for 1st coat Total upto 3 mm. in two coat
Initial setting	> 120 Minutes
Final setting	< 500 Minutes
Surface preparation for paint	after 24 hours
Paint application	after 72 hours
Full strength of putty	At 14 days
Coverage	Approx. 20 to 22 sq.ft. / kg / mm of thickness (Based on surface texture)
Application Temperature	+ 5° C. to + 35° C

(Data @ 23\* C. & 50% humidity)



- Recycled raw material used.
- VOC (Very low Organic Compounds).
- 100% suitable to recycle after expiry.
- Suitable for all kind of green and normal buildings.



- ✓ No Powder Leakage
- ✓ Moisture Proof
- ✓ Robust

**Walnut**  
create bonds, forever



Corporate Address

**Wallnut Building Solution India Pvt Ltd**

IJMIMA, 806, Off Link Road, Behind Goregaon Sports Club,  
Malad West, Mumbai – 400064

+91 22 49713322 | +91 9967007783  
info@wallnut.co.in | www.wallnut.co.in

CIN : U36999MH2017PTC289638

In Compliance with  
**EN & HDB (Singapore)**  
Norms



# GET SMILE ON YOUR HOUSE WALLS



A Premium Product from

**Walnut**  
create bonds, forever




### Salient Features

- Provide very high coverage compare to conventional putty.
- 20-22 sqft. per kg. of coverage for 1 mm. thickness.
- High quality German polymers, which retain water for long to do self-curing.
- Extra fine carbonate (50 micron) for easy application of putty and spread.
- Smooth and extra fine finish surface.
- High performance in all temperature.
- Suitable for internal and external.



### Salient Features

- High quality german polymer provides high tensile adhesion.
- High compressive strength & abrasion resistance.
- Resistant to water and dampness.
- No cracks on putty and paint surface.
- Does not de-bond from surface.
- No flaking of putty and paint.

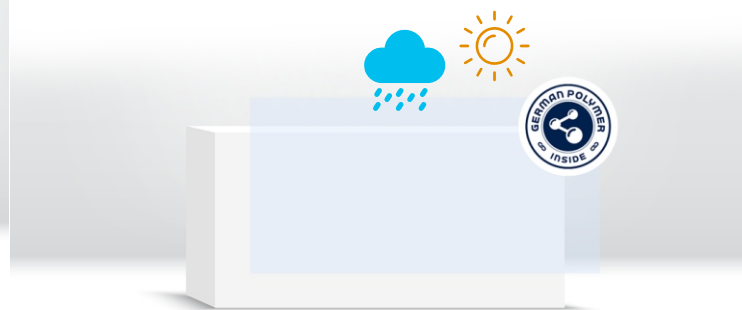

### Salient Features

- High quality pure white carbonates for extra whiteness.
- High quality white cement for high compressive strength.
- High gloss on final putty surface.
- Smooth surface provides extra shine to paint surface.

